

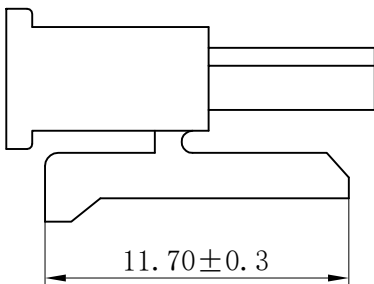


版次	日期	内容

Electrical properties

- Current rating: 3.5A AC\DC
- Voltage rating: 250V AC\DC
- Temperature range: -25°C to 85°C
- Contact resistance: Initial value/20mΩ max
- Insulation resistance: 1000MΩ min
- Withstanding voltage: 1000V AC/ minute
- Material : Nylon UL94V-0(2)

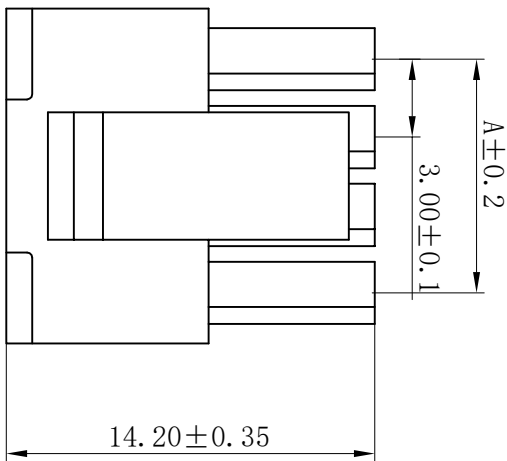

孔位 poles	A	B
2	3.0	6.9
3	6.0	9.9
4	9.0	12.9
5	12.0	15.9
6	15.0	18.9
7	18.0	21.9
8	21.0	24.9
9	24.0	27.9
10	27.0	30.9
11	30.0	33.9
12	33.0	36.9

浙江乐马电气有限公司 设计 张书晨

尺寸公差	角度公差	品名:	43645-nY	审核	王佳
.X ±0.25	X.° ±3.0°	图号:	30002-Y	批准	陈其林
.XX ±0.15	.X° ±2.0°	比例:	--	页数:	1/1
.XXX ±0.05	.XX° ±1.0°	单位:	mm	版本:	A

